




PARTS FOR OIL FILTER MOTOR PLATE

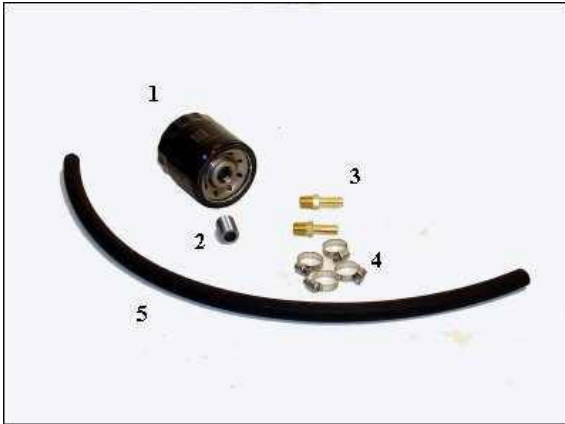

1	Oil Filter	(1)
2	Fitting for oil filter to plate	(1)
3	Fittings, 1/4" npt x 3/8" barb	(2)
4	Hose clamps	(4)
5	Oil line	(1)

Install oil filter fitting into motor plate using red loctite. Wait until loctite sets up completely before installing oil filter.

Install brass barb fittings into back side of motor plate using red loctite.

Cut and install oil line as needed and secure with hose clamps.

Note: Bottom line is for the feed into the filter, and center of filter is oil exit.